


De Dietrich

Hood

Ref.: **DHB4984B**

Adjust the brightness with different levels of intensity to suit your needs and desires.

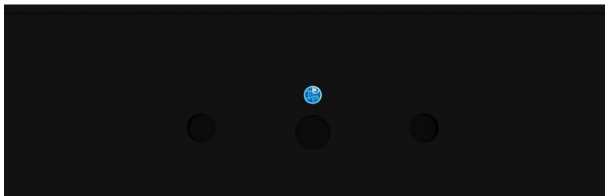

Product highlights

Motion control With simple hand gestures, control the suction power of your hood without touching it to avoid fingerprints.

Remote Control It allows you to regulate lighting, functioning and extraction power from distance.

Ambient light Choose from warm colors, a dimmed atmosphere, or white light to customize the ambiance.

GENERAL

Brand	DE DIETRICH
Commercial code	DHB4984B
EAN code	3660767996557
Customs code	84146000

FEATURES

Product type	Wall decorative hood
Design type	Slim box
Width (cm)	90
Finishing	Glass;Body in painted metal
Colour	Black
Air vented mode	Recycling or extracting air
Delivered in	Air extraction
Type of engine	Brushless
Total power of the motors (W)	160
Number of motors	1
Motor location	In chimney
Delayed stop	Yes
LED dimmer	Yes
Fan quantity	1

PERFORMANCE

Annual energy consumption (kWh)	36,4
Energy efficiency class	A+
Min extraction rate (m3/h)	170
Max extraction rate (m3/h)	370
Extraction rate with boost (m3/h)	660
Min recirculation rate (m3/h)	70
Max recirculation rate (m3/h)	230
Recirculation rate with boost (m3/h)	420
Min noise level (dB) (Extraction)	42
Max noise level (dB) (acoustic pressure)	57
Noise level with Boost (dB) (Extraction)	69
Min noise level (dB) (recirculation)	38
Max noise level (dB) (recirculation)	64
Noise level with Boost (dB) (recirculation)	76
Fluid dynamic efficiency class	A
Light efficiency class	B
Lighting efficiency (Lux)	168
Grease filter efficiency class	E

De Dietrich

Hood

Ref.: DHB4984B

CONTROLS & LIGHTS	
Control type	
Number of speed positions (without booster)	3
Booster	Yes
Filters saturation indicator	No
Type of light	Led stripe
Number of lights	1
Total power of the lamps (W)	8

EQUIPMENT	
Type of functions	Delayed stop;Mood lighting;Speed
Number of grease filters	2
Grease filter material	Dishwasher safe aluminium
Accessories supplied	Chimney
Reference of charcoal filter	FWND-185
Reference of recycling kit	
Optional accessories	Charcoal filter
Reference of engine	
Reference of the chimney extension	
Air outled diameter (mm)	150
Deflector	No
Non-return valve	Yes

INSTALLATION	
Fuse (A)	1.2
Voltage (V)	220-240
Frequency (Hz)	50-60
Other functions	
Dimensions of the product without chimney HxWxD (mm)	60X898X502
Min-max chimney height (mm)	730/935
Dimensions of the packed product HxWxD (mm)	540X1000X575
Net weight (kg)	20
Gross weight (kg)	24.5

MANUFACTURING	
Availability of spare parts (years)	15
Repair index	